


# DATA SHEET AQ-ALERT+ Air Quality Monitor

## FEATURES

- The AQ-Alert+ provides customers with a multi-gas monitoring system
- Compact, wall-mounted design
- Can be operated in three modes; stand-alone, direct control or integrated into a building management system.



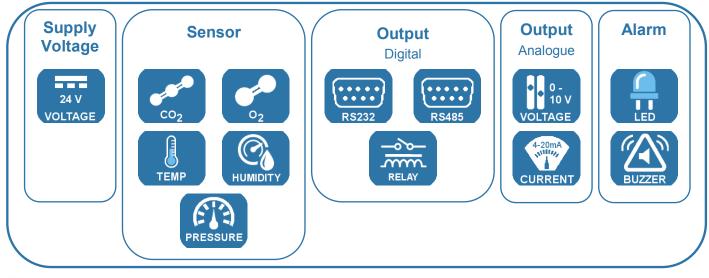

### 

Due to its versatility the AQ-Alert+ system is suitable for a variety of applications including schools, offices, homes and public buildings.

### **X** TECHNICAL SPECIFICATIONS

Supply voltage		24V <sub>DC</sub> ±10%
Current consumption <sup>(1)</sup>		250mA max.
Sensors	–up to five	CO <sub>2</sub> , O <sub>2</sub> , temperature (T),
		relative humidity (Rh) and
		atmospheric pressure (P)
Analogue output	-up to three	4—20mA; load 500Ω max.
		0—5V <sub>DC</sub> ; load 10k $\Omega$ max.
		$0-10V_{DC}$ ; load $10k\Omega$ max.
		1—5 $V_{DC}$ ; load 10k $\Omega$ max.
Communications	–one	RS232 or
		RS485 (Modbus RTU)
Relay outputs	-up to three	37.5VA, 250V <sub>AC</sub> max.
Alarms	-visual	LEDs; traffic light sequence
	–audio	Buzzer; 70dB at 4kHz

### SENSOR OPTIONS

CO<sub>2</sub> sensor:

Accuracy

Resolution

Measurement range



CO

O<sub>2</sub> sensor: Measurement range<sup>(2)</sup> Accuracy Resolution


0-25% 1% vol. O<sub>2</sub> 0.01% vol. O<sub>2</sub>

0-50°C

±2°C


0.1°C

0-5000ppm, 0-10000ppm ±70ppm, ±5% of reading<sup>(3)</sup> 1ppm






Accuracy Resolution



0-95%Rh non-condensing ±3% 0.1%



Resolution

750—1150mbar +5mbar 1mbar

**Apollosense Ltd** 



All possible sensor and output options fitted.

Prolonged operation below 0.1% O2 will damage the sensing element.

Whichever is greater.

#### Shenzhen


Adress: Room 712, Huaneng Building, Shennan Zhong Road, Shenzhen 518031, China Tel: (86-755) 83680810 83680820 83680830 83680860 Fax: (86-755) 83680866

Hong Kong: Adress: Unit 1502, Hollywood Plaza, 610 Nathan Road, Mong Kok, Kln., H.K. Tel: (852) 2737 0903 Fax: (852) 2737 0938 Email : sales@apollounion.com



### 

Generate your specific part number using the convention shown below. Use only those letters and numbers that correspond to the sensor and output options you require — omit those you do not. Include the 'AQM' prefix.

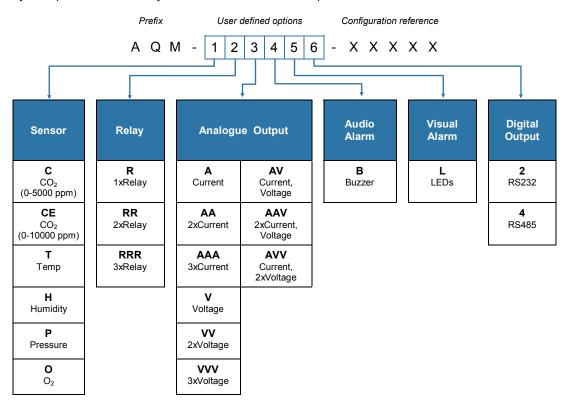

#### Examples:

- CO<sub>2</sub> sensor, O<sub>2</sub> sensor, two current outputs, buzzer and an RS485 output → AQM—COAAB4
- Temperature sensor, pressure sensor, O₂ sensor, two relays, one current output, two voltage outputs, buzzer and LEDs → AQM—TPORRAVVBL

#### Notes:

- Refer to <u>Technical Specifications</u> overleaf for option quantity details.
- Leave the Configuration reference blank, this will be defined by SST Sensing Ltd. at the time of ordering.

CAUTION Do not exceed maximum ratings and ensure sensor(s) are operated in accordance with their requirements. Carefully follow all wiring instructions. Incorrect wiring can cause permanent damage to the device. Do NOT use chemical cleaning agents.	<b>(D) INFORMATION</b> As customer applications are outside of SST Sensing Ltd.'s control, the information provided is given without legal responsibility. Customers should test under their own conditions to ensure that the equipment is suitable for their intended application.		
Failure to comply with these instructions may result in product damage.			

General Note: SST Sensing Ltd. reserves the right to make changes to product specifications without notice or liability. All information is subject to SST Sensing Ltd.'s own data and considered accurate at time of going to print.

DS-0087 REV 7

© 2016 SST SENSING LTD.



### Apollosense Ltd

Shenzhen: Adress : Room 712, Huaneng Building, Shennan Zhong Road, Shenzhen 518031, China Tel : (86-755) 83680810 83680820 83680830 83680860 Fax : (86-755) 83680866 Hong Kong: Adress : Unit 1502, Hollywood Plaza, 610 Nathan Road, Mong Kok, Kln., H.K. Tel : (852) 2737 0903 Fax : (852) 2737 0938 Email : sales@apollounion.com